


**arrowtrading home*****Arrow Trading***

## **GP-9000 Spot Welder**

[Call for Pricing](#)


**Important Note** : The GP9000B Spot Welder requires an 40AMP 6KA circuit breaker to handle the 6000amps of Current, Please ensure that you have sufficient power at the site where the welder will be used.

Technical Data	
Description	Data
Input Voltage	380V 50Hz
Input Power	11.5KVA
Delayed Fuse Current	32A
No-Load Voltage	11V
Dimensions	550 x 280 x 350mm
Electric Welding Current Range	200 - 4000A
Single Spot Welding Range	0.8 + 0.8mm
Cable Length	1500 +2000mm
Electric Welding Current Range	2000 - 6000A
Allowed Welding Thickness	2.5 + 2.5mm
Extended Arm Welding Thickness	1.0 + 1.0mm
Cable Length	1600mm
Air Pressure	>= 6MPa

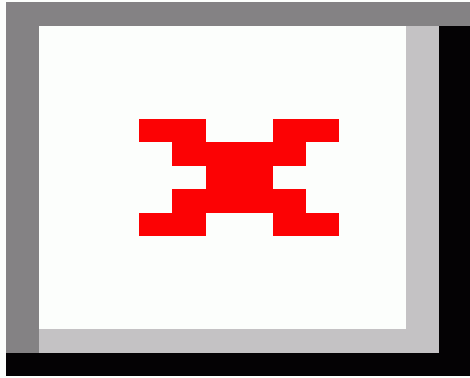

### General Information

- Digitally Adjustable : electricity time, welding current etc.
- Touch panel, durable and reliable.
- Stable output current.
- Microprocessor control to optimise welding parameters.
- Can be connected to Studder kit, manual spot gun and pneumatic spot gun.
- Continuous single spot welding and pulse single spot welding.
- Controlled by main voltage, all spots are distributed evenly.

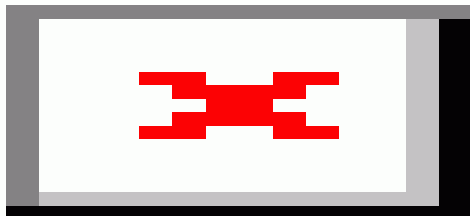

### [Vendor Information](#)