

arrowtrading home**Arrow Trading**

GP-9900A Spot Welder

[Call for Pricing](#)


The Hurricane GP-9900A Spot Welder is equipped with a Microprocessor digital control technology, with complete digital IC.

The simple and convenient design combined with the synergetic control panel ensures the optimum welder function. The moveable power supply and finished pneumatic spot gun, enables users to change operation as required. With optional different types of spot tools, various functions can be realised.

Important Note : The GP9900A Spot Welder requires an 60AMP 6KA circuit breaker to handle the 9000amps of Current, Please ensure that you have sufficient power at the site where the welder will be used.

Technical Data	
Description	Data
Input Voltage	380V 50Hz
Input Power	15KVA
Delayed Fuse Current	38A
No-Load Voltage	10.5V
Dimensions	550 x 350 x 400mm
Electric Welding Current Range	200 - 4000A
Single Spot Welding Range	0.8 + 0.8mm
Cable Length	1500 +2000mm
Electric Welding Current Range	2000 - 9000A
Allowed Welding Thickness	2.0 + 2.0mm 1.0 + 1.0 + 1.0mm
Extended Arm Welding Thickness	1.5 + 1.5mm
Cable Length	1600mm

Air Pressure	$\geq 6\text{MPa}$
--------------	--------------------

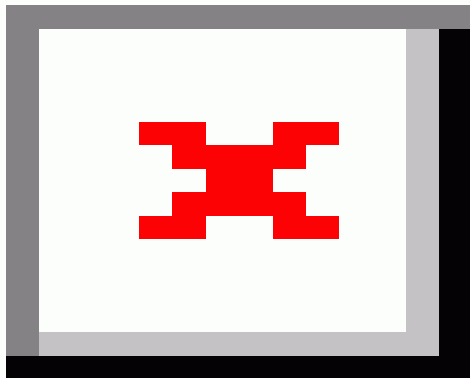

General Information

- Digitally Adjustable : electricity time, welding current etc.
- Touch panel, durable and reliable.
- Stable output current.
- Microprocessor control to optimise welding parameters.
- Can be connected to Studder kit, manual spot gun and pneumatic spot gun.
- Continuous single spot welding and pulse single spot

welding.

- Controlled by main voltage, all spots are distributed evenly.



[Vendor Information](#)